

2 BUCKET WASHING WITH DUAL MITTS


Tools:

2 buckets, 2 Grit Guards, 4 Flat Out Wash Pads, 1 Block Party Wash Block

Products:

Soap of choice

2 Bucket Method




- Always use 2 buckets when washing with Grit Guards placed in each bucket.
- Fill one bucket with soap (WASH bucket) and one bucket with pure water (RINSE bucket).

Example of washing upper sections:

- Use Flat Out Wash Pads, one pad for each section.
- After washing each section, drop pad in "RINSE" bucket. Grab a new pad and proceed. Follow this same process as you move around the vehicle.
- Once you've completed all 4 sections on one side of the vehicle grab and rinse out pads from your "RINSE" bucket. Place in "WASH" bucket and proceed with the same steps on the other side of the vehicle.

Example of washing lower section:

- Use Block Party wash block for bottom six inches of the vehicle and inner wheel well. Block Party measures 6" for ease of use.

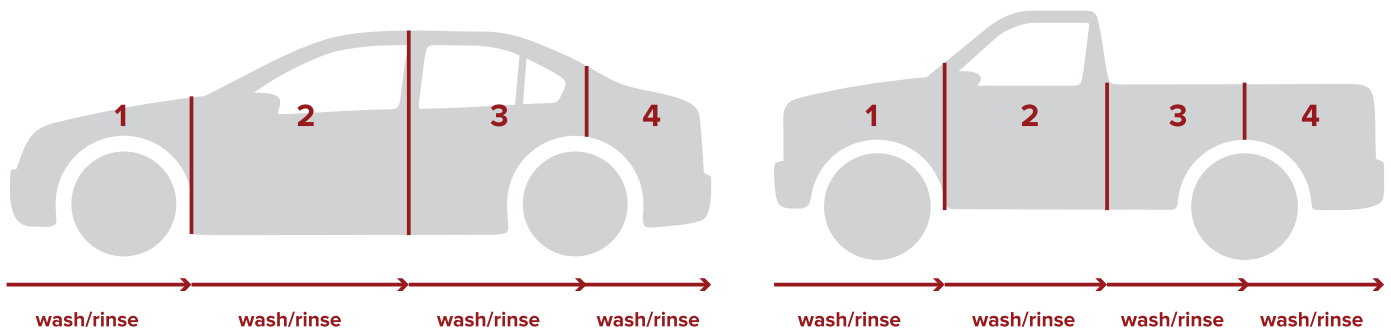

CERAMIC COATING MAINTENANCE

Mid-week maintenance (optional)

- Wipe down with Eco Shine waterless wash using the one pass/flip towel method.
- Follow with Throttle detail spray to promote self-cleaning properties of the coating.

Weekly wash maintenance

- Use Shift soap - Wash vehicle using the 2 bucket washing methods.
- Dry vehicle.
- Wipe down with Throttle detail spray.

Monthly maintenance

- Use Shift soap - Wash vehicle using the 2 bucket washing methods.
- Dry vehicle
- Apply Punch-It synergy spray

6 month maintenance

- Use Shift soap - Wash vehicle using the 2 bucket washing methods.
- Rinse vehicle and apply Smooth Move paint decontaminator while vehicle is wet.
- Re-wash vehicle with Shift soap using the 2 bucket washing methods.
- Dry vehicle.
- Apply Clutch silica spray to the entire vehicle using a soft microfiber applicator pad.
- Remove Clutch using (2) plush microfiber towels.

Annual maintenance

- Use Shift soap - Wash vehicle using the 2 bucket washing methods.
- Rinse vehicle and apply Smooth Move paint decontaminator while vehicle is wet.
- Re-wash vehicle with Shift soap using the 2 bucket washing methods.
- Dry vehicle.
- Apply Cherry silica wax to entire vehicle
- Remove the layer of Cherry silica wax using Clutch silica spray applied to a soft microfiber applicator pad.
- Remove the Clutch silica spray using (2) plush microfiber towels.

Annual maintenance option

Polishing of ceramic coating layer to remove imperfections that have developed on the surface.

- Use Slick Back primer polish to remove light defects.
- Use Burn Out reconditioning cream to remove medium/heavy defects.

Schedule an appointment with Stevens Detailing for this annual maintenance option